



System Configuration Example

Wireless Video Intercom System
VL-SWD501

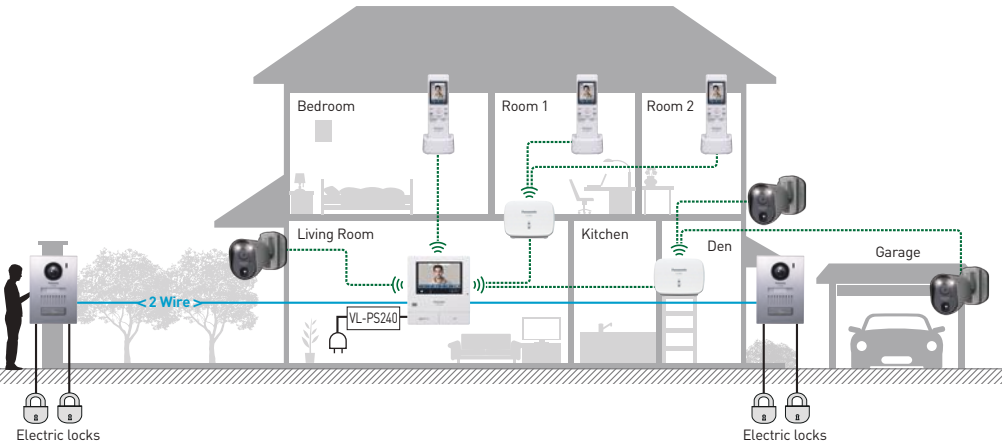


System Units	
Main Monitor Station VL-MWD501	Wireless Monitor Station VL-WD613 Up to 6
Door Station VL-V554 Up to 2	DECT Repeater VL-FKD2 Up to 2
Wireless Sensor Camera VL-WD812 Up to 4	

Video Intercom System
VL-SVN511

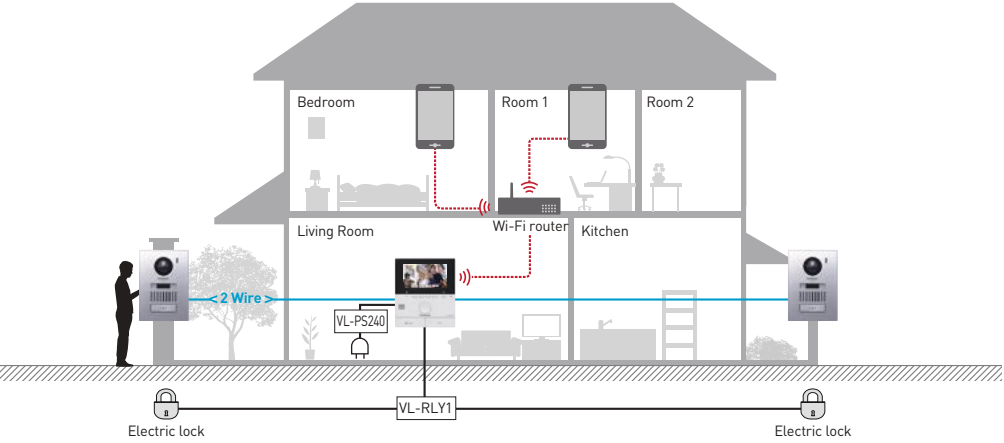

System Units	
Main Monitor Station VL-MVN511	Door Station VL-V555 Up to 2
	Mobile Devices Up to 4

Wired Video Intercom System
VL-SF70

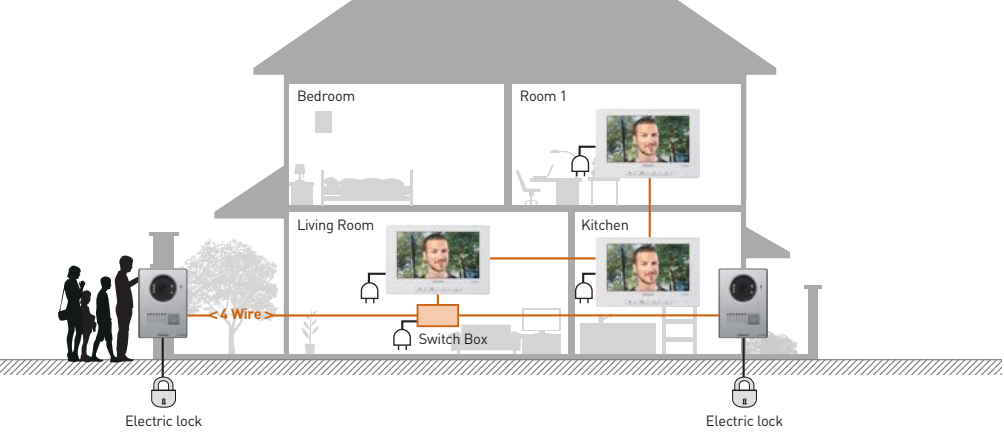

System Units	
Monitor VL-MF70 Up to 3	Door Station VL-VF580 Up to 2

Trademarks and registered trademarks
- Wi-Fi is a trademark or registered trademark of Wi-Fi Alliance.
- iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
- Android is a trademark of Google Inc.
- SDXC Logo is a trademark of SD-3C, LLC.
- The software of the sub monitor is based in part on the work of the Independent JPEG Group.
All other trademarks identified herein are the property of their respective owners.
Important
- Safety Precaution: Carefully read the operating instructions and installation manual before using this product.

- The actual product may vary slightly from the photograph.
- All pictures of the LCD display are simulated.
- Weights and dimensions are approximate.
- Design and specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY :

Panasonic®

Panasonic

VIDEO INTERCOM SYSTEM
LINE-UP CATALOGUE



VIEW AND TALK FLEXIBLY

Panasonic offers various Video Intercom System models to flexibly suit the size of your house and your lifestyle.



Stylish Premium Wireless Model VL-SWD501



Door Station x 1, Main Monitor x 1,
Wireless Sub Monitor x 1

Smartphone Connect Model VL-SVN511



Door Station x 1, Main Monitor x 1

7-inch Wired Model VL-SF70



Door Station x 1, Monitor x 1

Comparison Chart


Model Number		VL-SWD501	VL-SVN511	VL-SF70
Maximum Connectable Units	Main Monitor	1	1	3
	Smartphone/Tablet	—	● (4)*1	—
	Wireless Sub Monitor	6 (DECT)	—	—
	Door Station (Doorphone)	2 (Die-Cast Aluminium)	2	2
Recording	Movie/Picture Recording	●/●	—/●	—/●
	SD Card Recording	●	—	—
Connectable Devices	Sensor Camera	● (4)	—	—
	Electric Lock Release (Door Opener)	● (4)*2	● (2)	● (2)*2
	Repeater	● (2)	—	—
Others	Night Vision (LED Light)	●	●	●
	Touch Panel/Pan & Tilt	●	—	—
	Wide Angle Camera	●	●	—
	Intercom Call	● (Wireless)	—	● (Wired)
	Voice Changer	●	●	—

*1 The main monitor must be on the same home Wi-Fi network as a smartphone/tablet (with the dedicated app installed).

*2 When connecting 3 or 4, an optional Door Station is required.

Stylish Premium Wireless Model

Wireless Video Intercom System VL-SWD501

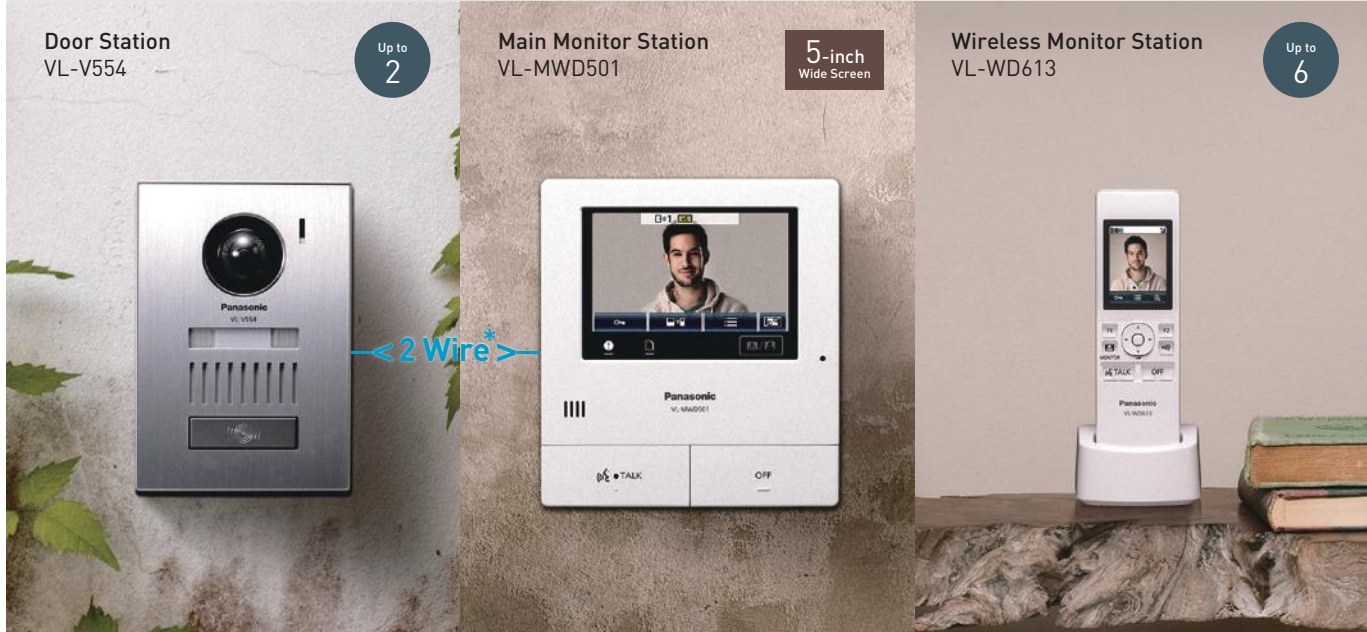

* Easy installation by simply replacing existing doorbell unit Nonpolar 2-wire system.

DECT Wireless

The wireless design means that there is no troublesome wiring required when adding on to the system as well. You can add on up to 6 sub monitors and 4 DECT Wireless Sensor Cameras for large homes, and easily confirm visitors from a monitor in each room.



Touch Panel

The main monitor has a 5-inch wide screen that clearly shows each visitor's face. If it is difficult to see, simply touch the screen to activate an approximate 2x zoom horizontally and vertically. This makes it easy for everyone to see, and provides an easy-to-use operating screen.



Other Features

- Electric Lock Release Support : AC12V-1A/DC12V-1A
- Wide-Angle Camera (Horizontally:170°, Vertically:115°)
- SD Card Recording (Stores up to 3,000 video recordings, each 30 sec in length)
- Wireless Sensor Cameras Connectable
- Flexible and Easy Expandability
- Easy Extension
- Voice Changer
- Intercom Call

SD Card Recording

You can automatically record video images of visitors while you're away from home. It will record up to 3,000 visitors (30 seconds per visitor). And you can save and play the images on a PC that has an SD card slot.



Options



Related Product



Smartphone Connect Model

Video Intercom System

VL-SVN511



* Easy installation by simply replacing existing doorbell unit Nonpolar 2-wire system.

Smartphone Connect*1

You can use your smartphone or tablet as a sub monitor to respond to visitors and unlock electric locks no matter where you are in the home. You can also monitor doorphone images when you want to check the door entrance.




Answer Visitors and
Unlock the Electric Locks



Monitoring

Wi-Fi Connection

In addition to smartphones/tablets, the main monitor can also wirelessly connect to the Wi-Fi router for easy connections without a cable. You can configure Wi-Fi settings using a simplified method (called WPS).

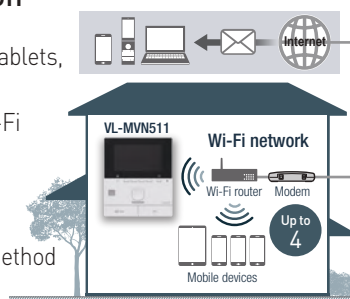

Options



*1 The main monitor must be on the same home Wi-Fi network as a smartphone/tablet (with the dedicated app installed). It is also necessary to run the dedicated app in order to receive visitor's calls on a smartphone/tablet.

*2 To use this function, a main monitor with e-mail sender information registered must be connected to the internet. E-mail may not be able to be sent, depending on the condition of the network.

E-mail Notification*2

The main monitor can send e-mail with a time stamp and image of visitors to e-mail addresses registered in advance, enabling you to check who has visited when you are outside the house (even when you are overseas).



Other Features

- Supports iOS and Android™ (free application)*
 - iPhone 5 and later, iPad (iOS 7.0 or later)
 - Android smartphones and tablets (Android 4.0 or later)
- Electric Lock Release Support: VL-RLY1 (12 V AC/DC, less than 1 A)
- Picture Recording (Up to 400 images/50 visitors (8 shots per visitor))
- Wide-Angle Camera (Horizontally:170°, Vertically:130°)
- Night Vision (white coloured LED lights)
- Voice Changer

* Some mobile devices may not be compatible.

* For the latest information about the app and compatible devices, visit the following website.

<http://panasonic.net/pcc/support/intercom/smartphone/>



7-inch Wired Model

Wired Video Intercom System

VL-SF70



7-inch Wide Monitor

This monitor features a 7-inch wide LCD. As the monitor, it lets you clearly identify visitors.




Picture Recording

Up to 50 images of visitors can be recorded while you are away from home. This useful function provides high security when you are not at home.



Three Monitors Connectable

A maximum of three monitor units can be connected. By installing them in the living room and other rooms where you spend the most time, such as a bedroom or kitchen, you can answer the visitor immediately.

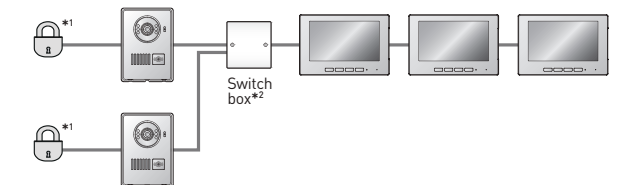


*1 Electric lock (user supplied)

*2 Switch box included with the optional VL-VF580

Other Features


- Electric Lock Release Support (Door Opener) : DC12V-1.5A
- Intercom Call (between monitors)

Options

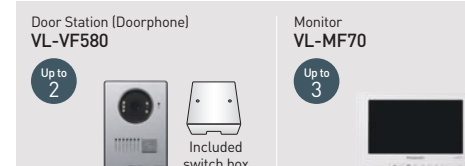

VL-SWD501

Model Composition



Model number and name	VL-MWD501FX	VL-V554FX (Surface mount) VL-V554UFX (Flash mount)	VL-WD613FX	
	Main Monitor Station (Main monitor)	Door Station (Doorphone)	Wireless Monitor Station (Sub monitor)	
Dimensions (Unit: mm)			Main body	Charger
Power source	Power supply unit (VL-PS240) 24 V DC, 0.5 A	Power supplied by the main monitor 20 V DC, 0.23 A	Rechargeable Ni-MH (AAA x 2)	AC adaptor (PNLV226CE/PNLV226E) Input: 220-240 V AC, 0.1 A, 50/60 Hz Output: 5.5 V DC, 0.5 A
Power consumption	Standby: Approx. 1.4 W During operation: Approx. 10 W	—	—	Standby: Approx. 0.4 W (when the sub monitor is not placed in the charger) During charging: Approx. 1.4 W
Dimensions (H x W x D) (Excluding protruding sections)	180 x 165 x 21 mm	VL-V554FX: 169 x 118 x 30 mm VL-V554UFX: 169 x 118 x 16.5 mm (excluding sections embedded into the wall)	173 x 52 x 30 mm	43 x 81 x 76 mm
Weight	470 g	VL-V554FX: 405 g, VL-V554UFX: 345 g	160 g (including the batteries)	70 g (excluding the AC adaptor)
Operating environment	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %	Ambient temperature: Approx. -15 °C to +55 °C Relative humidity (non-condensing): up to 90 % (tested up to -20°C)	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %
Display	5-inch wide colour / WQVGA (800x480 pixel)	—	2.2-inch, colour / QVGA (320x240)	—
Frequency	1.88 GHz to 1.90 GHz	—	1.88 GHz to 1.90 GHz	—
Option output (A contact)	Rated load: 24 V AC/DC, 0.3 A or lower Minimum applicable load: 5 V DC, 0.001 A (Output when there is a call from the doorphone)	—	—	—
Viewing angle	—	Horizontally: Approx. 170° Vertically: Approx. 115°	—	—
Installation method	Wall mount (mounting bracket supplied)	VL-V554FX: surface mount (mounting base supplied) VL-V554UFX: flush mount (flush mounting box supplied)	—	—
Minimum illuminance required	—	1 lx (within approx. 50 cm from the camera lens)	—	—
Lighting method	—	Warm white LED lights	—	—
IP rating / IK rating	—	IP54*1 / Compliant with IK07	—	—
External material	Flame retardant ABS and PS resin	Aluminium and flame retardant PC+PS resin	ABS resin	ABS resin

Options

Model number and name	VL-WD812FX (For VL-SWD501)	VL-FKD2FX (For VL-SWD501)
	Wireless Sensor Camera	DECT Repeater
Dimensions (Unit: mm)		
Power source	Power supply unit (VL-PS240) 24 V DC, 0.4 A	AC adaptor (PQLV219CE/PQLV219E) Input: 220-240 V AC, 0.1 A, 50/60 Hz Output: 6.5 V DC, 0.5 A
Power consumption	During standby: Approx. 1.5 W During operation: Approx. 4.5 W (when the LED lights are not lit), Approx. 8 W (when the LED lights are lit)	During standby: Approx. 1.5 W During operation: Approx. 2.3 W (when transmitting)
Dimensions (H x W x D)	160 x 118 x 290 mm (when the camera is front facing and including the wall mount bracket)	82 x 111 x 39 mm
Weight	960 g	88 g (excluding the AC adaptor)
Operating environment	Ambient temperature: Approx. -20 °C to +50 °C Relative humidity (non-condensing): up to 90 %	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %
Frequency	1.88 GHz to 1.90 GHz	1.88 GHz to 1.90 GHz
Installation method	Wall mount (wall mount bracket supplied)	—
Transmitting range	Approx. 100 m (line-of-sight distance from the main monitor)	Approx. 100 m (line-of-sight distance from the main monitor)
Minimum illuminance required	1 lx*2	—
Image sensor	0.3 M pixel CMOS	—
Lighting method	2 white LED lights*3	—
Angular field of view (camera angle)	Horizontal: Approx. 53° Vertical: Approx. 41°	—
Sensor detection range	Heat sensor (when the surrounding temperature is approx. 20°) Horizontal: Approx. 63°, vertical: Approx. 20°, detection range: Approx. 5 m Motion detection sensor Horizontal: Approx. 53°, vertical: Approx. 41°	—
Sensor detection method	Pyroelectric infrared sensor (heat sensor) and motion detection	—
IP rating	IP54*1	—
Adjustable mounting angles	Horizontal: ±90°, vertical: facing forward - facing down approx. 60° (adjustable when mounting)	—
Heat sensor adjustable angles	Manually adjustable to 2 angles	—
External material	PC+ABS resin	PS resin

*1 Water resistance is only assured if the Door Station/the camera is installed correctly according to the instructions in the Installation Guide, and appropriate water protection measures are taken.


Do not install the camera in areas directly exposed to water or rain.

*2 The minimum illuminance required when the camera's [Brightness] setting is set to [+3].

*3 Approx. 8.5 lx when 3 m in front of the camera, and approx. 4 lx when 3 m away and 20° to the left or right of the camera.

VL-SVN511

Model Composition



Model number and name	VL-MVN511FX	VL-V555FX	VL-PS240	VL-RLY1
	Main Monitor Station (Main monitor)	Door Station (Doorphone)	Power Supply Unit * indoor use only	Relay Box
Dimensions (Unit: mm)				
Power source	Power supply unit (VL-PS240) 24 V DC, 0.5 A	Power supplied by the main monitor	Input: 220-240 V AC, 0.2 A [50Hz /60Hz] Output: 24 V DC, 0.6 A	Power supplied by the main monitor
Power consumption	Standby: Approx. 1.8 W During operation: Approx. 10 W	—	—	—
Dimensions (H x W x D) (Excluding protruding sections)	186 x 161 x 23.5 mm	169 x 118 x 30 mm	116 x 100 x 54 mm	92 x 78 x 38 mm
Weight	485 g	395 g	230 g	130 g
Operating environment	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %	Ambient temperature: Approx. -15 °C to +55 °C Relative humidity (non-condensing): up to 90 % (tested up to -20°C)	Ambient temperature: approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %	Ambient temperature: approx. 0 °C to +40 °C Relative humidity (non-condensing): up to 90 %
Display	5-inch, wide colour / WQVGA (480x272 pixel)	—	—	—
Display language	English, Polish, Romanian, Hungarian	—	—	—
Talking method	Hands-free	—	—	—
Frequency	Wi-Fi: (IEEE 802.11 b/g/n 2.4 GHz)	—	—	—
Viewing angle	—	Horizontally: Approx. 170° Vertically: Approx. 130°	—	—
Installation method	Wall mount (mounting bracket supplied)	Surface mount (mounting base supplied) * Optional flush mounting box is sold separately.	Attach to DIN rail	Attach to DIN rail
Minimum illuminance required	—	1 lx (within approx. 50 cm from the camera lens)	—	—
Lighting method	—	White coloured LED lights	—	—
IP rating / IK rating	—	IP54*1 / Compliant with IK07	—	—
External material	Flame retardant ABS and PS resin	Aluminium and flame retardant PC+PS resin	Flame retardant PC+ABS resin	Flame retardant ABS resin

VL-SF70

Model Composition



Model number and name	VL-MF70FX	VL-VF580FX
	Monitor	Door Station (Doorphone)
Dimensions (Unit: mm)		
Power supply	AC adaptor (PNLV245), 24 V DC, 0.5A	Supplied by the monitor
Power consumption	Standby: Approx. 1.3 W During operation: Approx. 10 W	—
Dimensions (H x W x D) (Excluding protruding sections)	135 x 201 x 25.5 mm	143 x 101 x 35 mm
Weight	465 g	265 g
Operating environment	Ambient temperature: Approx. 0 °C to +40 °C Relative humidity (non-condensing): from 45 % up to 90 %	Ambient temperature: Approx. -15 °C to +55 °C Relative humidity (non-condensing): up to 90 % (tested up to -20 °C)
Display	Approx. 7 inches wide colour display	—
Talking method	Hands-free	—
Viewing angle	—	Horizontally: Approx. 51° Vertically: Approx. 38°
Installation method	Wall mount (Wall mount bracket included)	Wall mount (Mounting base attached)
Minimum illuminance required	—	1 lx (within approx. 50cm from the camera lens)
Lighting method	—	White coloured LED lights
IP rating / IK rating	—	IP44*1
External material	Flame retardant ABS resin	Flame retardant ABS resin

Compatibility of Main Monitor and Door Station

O= Connectable ●= Connectable [same as included unit] — = Not connectable

Main Monitor [Set No.]	Door Station		
	VL-V554FX	VL-V555FX	VL-VF580FX
VL-MWD501 [VL-SWD501]	● [Set]	○	—
VL-MW511 [VL-SVN511]	○	● [Set]	—
VL-MF70 [VL-SF70]	—	—	● [Set]

*1 Water resistance is only assured if the Door Station is installed correctly according to the instructions in the Installation Guide, and appropriate water protection measures are taken.